# E-blanks HK416 Menu Guide




Author Approved by		Rev.	
Erik Boye Abrahamsen		2	
Date	Revision	Description	7
15.02.2023	1	Initial document	
29.06.2023	2	Modified 0.6.0	menu

# 1 TABLE OF CONTENTS

2	Mer	nu Guide	. 3
	2.1	Start menu	. 3
	2.2	Main Menu	. 3
		Mode Menu	
		Pair Menu	
		Pair Search Menu	
		Calibration Menu	
		Programming Countdown Screen	
	Z./	Programme Countrown Scien	. 그

## 2 MENU GUIDE

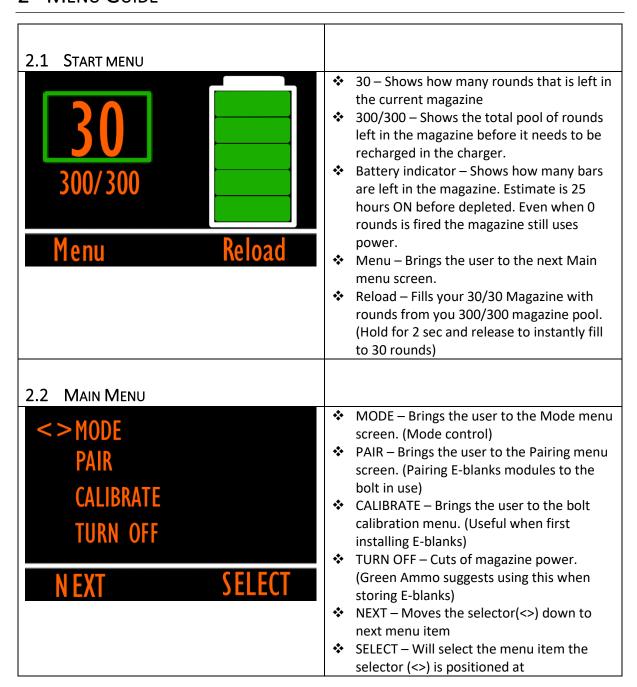

### 2.3 MODE MENU STOPPAGE – Stoppage is random faulty <>STOPPAGE round, will make the visible light on the Eblanks bolt in the ejector port turn RED. **NIGHT MODE** ❖ NIGHT MODE – Will make the visible light on the E-blanks bolt in the ejector port turn off. (Useful when training with Night vision) **SAVE&EXIT** ❖ MUTE – Will turn off the speaker sound in the magazine. ❖ SAVE&EXIT –MUST be selected to tell the magazine to program the bolt to have the selected modes. This will activate the **Programming Countdown Screen** 2.4 Pair Menu Pair menu allows the user to pair a new E-<>RECOIL blanks device. Selecting any of the items will bring the user to the Pair Search Menu and start searching for available E-blanks modules. ❖ SAVE&EXIT – MUST BE SELECTED to prompt the Programming Countdown **SAVE&EXIT** Screen to tell the bolt which E-blanks modules to connect to. ❖ RECOIL – Starts scanning for available Recoil devices. ❖ SOUND – Starts scanning for available Sound devices. EXT.TRIG – Starts scanning for External trigger devices. (3rd-party devices that will receive the trigger signal via BLE 5.1) 2.5 Pair Search Menu This menu will show scanned modules in proximity (approximately 1.2m) The available modules will show their label name below the DELETE item (MM is the module and #### is their given number) ❖ When a new unit is selected the user will be brought back to the Pair menu for pairing more devices or for saving the pair choice with SAVE&EXIT ❖ DELETE – Will remove the already paired

connection information.

#### 2.6 CALIBRATION MENU



- This menu is for calibrating the bolt to a new weapon install.
- It will trigger a new reading of the trigger pull of the weapon it is installed in
- NOTE BEFORE MOVING ON WITH A CALIBRATION THE WEAPON NEEDS TO BE PREPARED FOR A CALIBRATION
- \* Preparing the weapon for a new calibration:
  - > Have E-blanks bolt installed.
  - Set the weapon into single fire on the selector.
  - Pull the trigger so that the hammer is in forward position.
  - Now the weapon is prepared for a calibration reading.
- NEW Will start a new reading when installed into a weapon that has been prepared for calibration\*
- RESET Will reset the calibration values to factory default

#### 2.7 Programming Countdown Screen

INSERT MAG
30

- This screen shows a countdown from 30 seconds.
- This prompts the user to insert the magazine into the weapon with the desired E-blanks bolt to be programmed for calibration, new pairing or new modes.
- If any button is clicked while the countdown is active, it will cancel the countdown and the user will need to apply the modes or calibration selections over again.